





EGM series slurry pumps are heavy duty slurry pumps and have outstanding performance in high head applications. This series are suitable for handling low corrosive slurries of various concentrations.

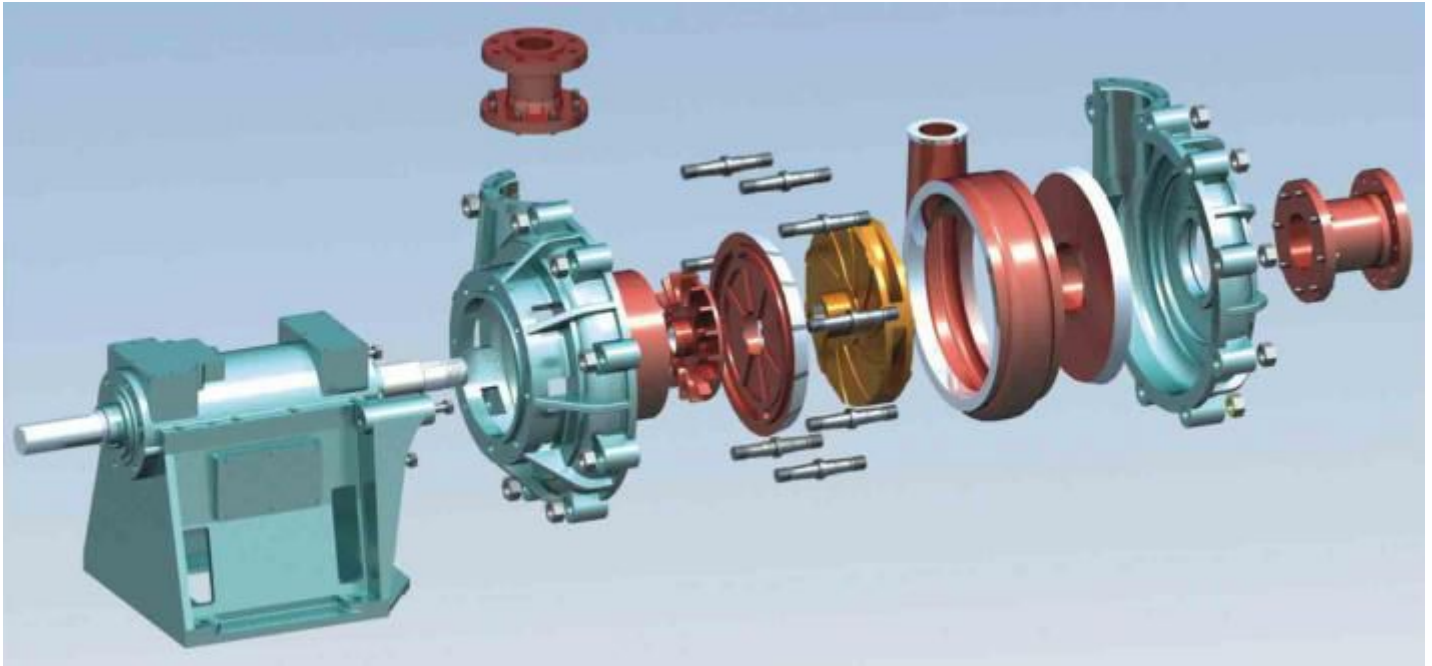

- Superb performance in high head application
- Cylindrical structure of bearing assembly: convenient to adjust the space between impeller and front liner and can be removed completely;
- Interchangeable anti-abrasive wet parts made of high-chrome alloys;
- The discharge branch can be oriented to any eight positions at the interval of 45 degrees;
- It can be installed in multistage series to meet the delivery for long distance;
- Various drive types: DC(direct connection), V-belt drive, gear box reducer, hydraulic couplings, VFD, SCR control, etc;
- The shaft seal uses the packing seal, expeller seal and mechanical seal;

❖ Structure

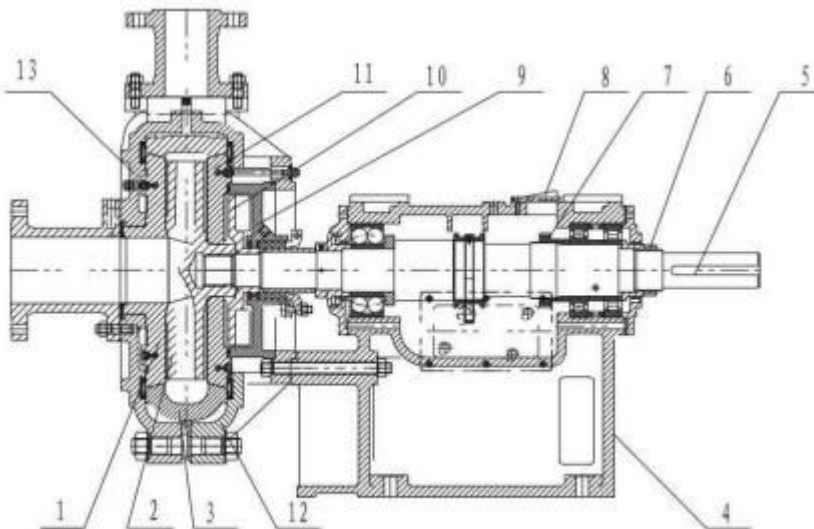

1. Throatbush
2. Impeller
3. Volute liner
4. Support
5. Shaft
6. Adjusting screw II
7. Adjusting screw I
8. Adjusting hole cover
9. Expeller ring
10. Expeller
11. Frame plate liner insert
12. Frame plate
13. Cover plate

Note: this is the basic structural drawing. There is a little difference up to the varied discharge sizes.



Bearing Assembly

Convenient to adjust the space between impeller and front liner and can be removed completely;

- Lubricated by grease;
- Easy maintenance.

Shaft Seal

There are three standard shaft seal methods:

- Packing seal: it is the lowest in cost.
- Expeller seal with packing seal: it is most commonly used.
- Mechanical seal: it has best seal effect, but high in cost and has strict requirement of flush water.

Material

The wet parts material for standard EGM series pump is high-chrome alloy. This kind of material is wear resistant and has excellent performance under erosive conditions.

- KmTBCr27: hard carbides within its microstructure provides strong wear resistance
- KmTBCr28: its hardness is 430 in Brinell and suitable for corrosive applications where pH is below 4.
- KmTBCr35: its hardness is 450 in Brinell and has much improved corrosion resistance.

❖ Performance Chart

	Allowable Max. Power P(Kw)	Clear Water Performance						Impeller
		Capacity Q		Head H(m)	Speed n(r/min)	Top Efficiency η%	NPSH(m)	Impeller Diameter D(mm)
		m ³ /h	l/s					
EGM-1C	30	16.2-34.2	4.9-9.5	25-92	1400-2200	20	2-2.5	330
EGM-2D	60	68.4-136.8	19-38	25-87	850-1400	47	3-7.5	457
EGM-3E	120	126-252	35-70	12-97	600-1400	50	2-5	508
EGM-4S	560	324-720	90-200	30-118	600-1000	64	3-8	711
EGM-6S	560	468-1008	130-280	20-94	500-1000	65	4-12	711

❖ Application

Series EGM slurry pumps are widely used in the mining, coal washing, power plant, metallurgy, petrochemical, building material, dredging, and other industrial departments, etc.

Typical Application:

- Iron Ore Dressing Plant
- Copper Concentration Plant
- Gold Mine Concentration Plant
- Molybdenum Concentration Plant
- Potash Fertilizer Plant
- Other Mineral Processing Plants
- Alumina Industry
- Coal Washery
- Power Plant
- Sand Excavation
- Building Material Industry
- Chemical Industry
- Other industries



EGM-6S Coal Washery in Australia



Headquarter:

Add: No.368, Xinshi North Road, Shijiazhuang, Hebei, China 050091.

Beijing Branch:

Add: No.78, East 4th Ring Middle Road, Beijing, China 100124.

Tel: +86-10-81107022

Fax: +86-10-81107016

Tel: +86-10-81107022

Fax: +86-10-81107016

For inquiries, please send your emails to sales@excellencepump.com

For customer service, please send your emails to service@excellencepump.com